Inverator Starting Energy Saver Design For Electric Power Efficiency In Water Pumps

by Faisal Irsan

Submission date: 25-Jan-2024 01:06PM (UTC+0700)
Submission ID: 2278028077
File name: Inverator_Starting_Energy_Saver_Design_For_Electric_Power.pdf (352.89K)
Word count: 3181
Character count: 16544

Journal of Electrical Technology UMY (JET-UMY), Vol. 5, No. 1, June 2021
ISSN 2550-1186 e-ISSN 2580-6823

Inverator Starting Energy Saver Design For Electric Power Efficiency in Water Pumps

Faisal Irsan Pasaribu*, Noorly Evalina, Partaonan Harahap
Department of Electrical Engineering, Faculty of Engineering, Universitas Muhammadiyah Sumatera Utara
Street Muchtar Basri No.3, Phone/fax 061-6624567/061-6625474, Medan, North Sumatra, Indonesia
*Corresponding author, e-mail: faisalirsan@umsu.ac.id

Abstract –*The use of a water pump at the initial start is the use of electricity with a large capacity which sometimes faces various kinds of efficiency problems. These problems include an increase in current that occurs in the channel by improving the quality of electric power, especially in the electrical system in the area of the use of the water pump, which is expected to be able to improve the quality of electric power. The purpose of the research was to design an inverator starting energy saver as an effort to improve power quality for electricity savings, electric power efficiency in water pumps. This improvement is also expected to be able to reduce the cost of using electricity bills, especially in the use of water pumps. To be able to carry out the improvement of the quality of the electric power, it is necessary to calculate the active power and apparent power when the water pump is used. After performing these calculations, the installation of the inverator starting circuit saver electricity will be used. By carrying out these steps by installing a series of invertor that can improve the quality of electrical power. And by using the inverator circuit starting Energy saver, it is clear that it produces an active power efficiency value of 82% of the active power before using the 272-watt inverator circuit and active power after using the 223.9-watt inverator circuit, and also produces an apparent power efficiency value of 83% before using the circuit inverator 275.18 VA and apparent power after using the inverator circuit 227.94 VA.*

Keywords: *Starting Energy Saver, Inverator, Water Pump, Efficiency*

I. Introduction

In modern life today the use of electrical energy is very large, the amount of energy used is determined by reactance (R), inductance (L) and capacitance (C). Every household equipment (load) certainly has a difference in the amount of electrical energy consumption needed. This is because the equipment (load) is both inductive and capacitive, which generates reactive power [1] [2]. This reactive power is useless power so that it cannot be converted into power but is needed for the process of transmitting electrical energy to the load [3] .

.This improvement is also expected to be able to reduce the cost of electricity bills at home and at locations that use water pumps [4] [5]. Recent technological developments have progressed quite rapidly, marked by the presence of electronic equipment or commonly referred to as electrical loads. The use of electrical loads today is indeed far more complex than the use of electrical loads in the past. The use of these electrical loads is widely used both in households, office buildings, and in industry so that it affects and causes a decrease in the supply system and power quality [6] [7].

The need for good quality electrical power and in terms of various electrical equipment used both in laboratories, lecture rooms, and other rooms that use electrical equipment [8], it is very necessary to have good quality electrical power in supporting all forms of lecture activities within the scope of faculty, Generally, the distribution of electrical power is used to serve loads such as: electric motors, computers [7] and other electrical equipment in which these loads contain coils of inductor wire. Inductors are components that absorb electric power for the purposes of magnetization

Manuscript received May 2021, revised June 2021 *Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved*

and electric power. is called reactive power [9] [10].

Based on previous research on energy saving, the researchers designed an inverator starting energy saver on a water pump where this research was conducted aiming to design an Inverator Starting Energy Saver circuit that is useful for saving electricity on a water pump, to analyze the difference before and after using the Inverator Starting Energy Saver circuit on the water pump, to calculate the efficiency value contained in the water pump.

II. Methodology

The research was conducted at the Electrical Engineering Laboratory, Faculty of Engineering, Universitas Muhammadiyah Sumatera Utara and at Street Gelatik 12 No. 399 Perumnas Mandala.

Inverator is a tool for boosting electrical power surges, this tool does not violate the provisions of PLN because it does not interfere or change anything on the PLN meter. The electrical power capacity installed on the home network will limit the use of electrical power that can be distributed to the load [7]. The inverator is designed to reduce the electric current caused by electrical loads, while the core components of simple inverator equipment are 0.3 mm diameter nickelin wire in the form of a winding, 820 Ohm resistor, LED and gypsun compound fluid, as shown in Figure 1 below:

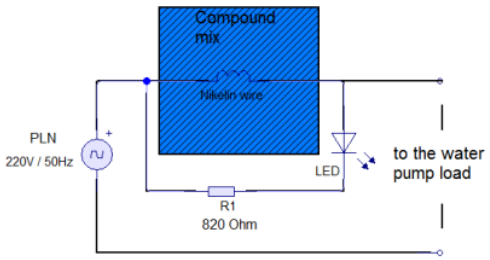


Fig 1. Simple Inverator Design

It can be seen in Figure 1, the blue color is a compound mixture in which there is a nickeline wire. The resistor is connected in series with the cathode of the LED, the ends of each resistor and the anode of the LED are connected in parallel with the ends of the nickeline wire. The end of the nickel wire and the LED anode is one of the positive output terminals of the load, and for the negative terminal output directly from the negative source of the inverator circuit. The function of this inverator is a tool to reduce current through the parallel winding of nickeline and resistors, and the function of this compound mix is to function as an insulator and coolant on nickeline wire.

There are 4 ingredients as the main components in the completion of this research, namely:

1) Inverator Starting Energy Saver, used as a 10% - 40% electrical energy saving device which is suitable for use for electric motor loads such as Water Pumps.

2) Power Meter, Power meter is a measuring instrument that can read voltage, current, frequency, power factor, active power and KVARH electricity consumption [11],

3) Shimizu brand water pump PS 160 BIT model as the measured load

4) Stop Contact, as a liaison between the Water Pump and the Inverator Circuit Starting Energy Saver.

Inverator Starting Energy Saver Inverators are several Varistors and Capacitors and other circuits that will reduce inrush currents and Energy Savers on electric motor loads [10] [12], especially the use of Water Pumps. In general, electrical loads that have inrush current characteristics are electric motors [13], but this also happens to other electrical equipment that has capacitors/elco and diodes or rectifier circuits, such as power supplies on PCs. An electric power booster is an electronic device that is used as a medium for distributing electrical energy and increasing the use of electrical energy [14]. In accordance with the working principle of an electric generator, this unit is capable of producing a strong current and alternating voltage (AC) which works through the principle of activation of AC electric voltage.

The process of testing and data collection will be carried out every 30 minutes when the Water Pump is used. Data recording and observation is carried out starting from data on voltage, current, frequency, Pf, active power and apparent power generated before and after using the Inverator Starting Energy Saver circuit.

III. Result and Analysis

The design and installation of the test equipment is shown in Figure 2. Knowing the current, voltage and frequency of the water pump used is very important, especially if we want to install an inverator starting Energy Saver for efficient use of electrical power. From the data, the value on the nameplate on the water pump used is

Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved

not absolute because the electric voltage from the PLN source is not constant at 220 Volts [10].



Fig. 2. Tool Design



Fig. 3. Nameplate water pump

Judging from Figure 3 above, the important data from the water pump needed for measurements and calculations are 220 Volt voltage, 1.3 Ampere current and 50 Hz frequency.

The researchers conducted measurements and direct observations in the field to prove the value of voltage, current, frequency and power factor (cos phi) [15] [16] , as well as the power generated when the water pump was operating. So the authors would like to inform the results of research conducted from observations carried out that studies of data collection in the field can be concluded that the differences that will occur before and after using the inverator starting Energy Saver, where data collection for 30 minutes is then changed to 60 minutes due to usage time pump water in one day 60 minutes or 1 hour of use, to meet 500 liter water barrels plus 2 300 liter water tanks for a total of 800 liters per 30 minutes of running water pump, then multiplied in one month of use.

III.1 Measurements Result

1) Live Load Data Not using Inverator starting Energy Saver

Measurements and direct observations were carried out for 30 minutes to meet the 800 liter water needs. The results of these measurements and direct observations without using the Inverator starting Energy Saver, where the measuring instrument used is the power meter.

From the measurement results, the data on the results of voltage, current, power factor and power can be tabled in table 1 below:

TABLE I
LOAD MEASUREMENT BEFORE USING THE INVERATOR STARTING ENERGY SAVER

Load	T	Voltage	Current	Power factor	Load Power
Water Pump Shimizu PS 160 BIT	30 minute	216 V	1,274 A	0,98	272 W

2) Live Load Data Already Using Inverator Start Energy Saver

Based on the purpose of this study to produce efficiency in the use of electrical energy, direct measurements and observations were carried out for 30 minutes to meet 800 liters of water needs. The results of measurements and direct observations are using the Inverator starting Energy Saver, where the measuring instrument used is the power meter.

From the measurement results, the data on the results of voltage, current, power factor and power can be tabled in table II below:

TABLE II
MEASUREMENT OF LOAD AFTER USING INVERATOR STARTING ENERGY SAVER

Load	T	Voltage	Current	Power factor	Load Power
Water Pump Shimizu PS 160 BIT	30 minute	207,6V	1,098 A	0,98	223,9 W

From the measurement results when using the Inverator Starting Energy Saver, there is a decrease in voltage and current as well as the power generated at the water pump. This is due to the large enough resistance in the inverator circuit, so that the inverator output voltage drops. This voltage drop also affects the current decrease due to resistance through obstacles in the inverator circuit. From the results of the voltage using the Inverator Starting

Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved

Energy Saver, it is still allowed because it is not up to 10%, which is 9.4%.

III.2 Calculation

1)Calculations Before and After Using the Inverator Starting Energy Saver

Active Power (Before) [17]
Given: V = 216. Volt
I = 1.274 Ampere
Power factor (Cos phi) = 0.98
Asked : P .....?
P = V x I xCos phi [17]
= 216 x 1.274 x 0.98
= 269.68 Watt→on the Power Meter measuring instrument reads 272 Watt


Active Power (After)
Given: V = 207.6 Volt
I = 1.098 Ampere
Power factor (Cos phi) = 0.98
Asked : P .....?
P = V x I x Cos phi
= 207.6 x 1.098 x 0.98
= 223.39 Watt→on the Power Meter measuring instrument it reads 223.9 Watt

2) Apparent Power Calculation Before and After
Apparent Power (Before) [18]

Given: V = 216. Volt
I = 1.274 Ampere
Asked: S.....?
S = V . I
= 216 x 1.274
= 275.18 VA

Apparent Power (After)
Given: V = 207.6 Volt
I = 1.098 Ampere
Asked: S.....?
S = V . I
= 207.6 x 1.098
= 227.94 VA

From the measurement results and the calculation results for active power and apparent power before and after using the inverator starting energy saver circuit, the results can be seen in the following graph of Figure 4:

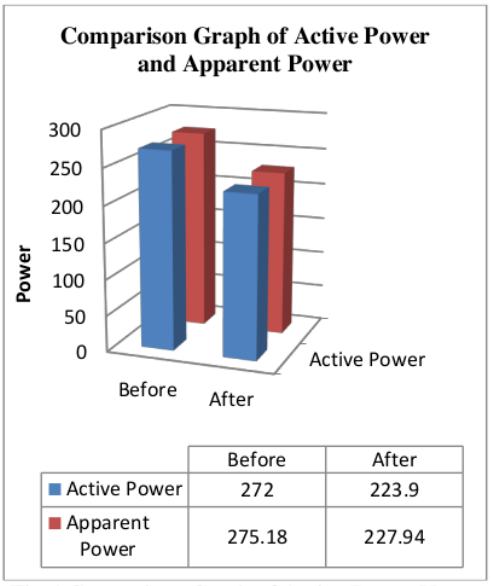

	Before	After
Active Power	272	223.9
Apparent Power	275.18	227.94

Fig 4.Comparison Graph of Active Power Usage and Apparent Power Before and after Using the Inverator Starting Energy Saver

3)Active Power Consumption Efficiency, ApparentPower

Active Power Efficiency [19]
Given : P after : 223.9 Watt
P before : 272 Watt
Asked :Efficiency……?
η % =(P after)/(P before)x 100%
=223.9/272 x 100%
=0.82 x 100%
= 82%

Apparent Power Efficiency
Given= S after : 227.94 VA
S before : 275.18 VA
Asked : Efficiency……?
η% =(S after)/(S before)x 100%
= 227.94/275.18 x 100%
= 0.83 x 100%
= 83%

IV. Conclusion

Based on the purpose of this research, here the expected results and also able to reduce the use of electric power, especially in the use of water pumps. To be able to carry out the improvement of the quality of the electric power, it has been carried out and has concluded the calculation of the active

Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved

power and apparent power when the water pump is used. After doing these calculations, through the use of the inverator starting circuit, the electricity saver is used. By performing these steps by installing and using the inverator circuit starting Energy saver, it is clear that it produces an active power efficiency value of 82% of the active power before using the 272 Watt inverator circuit and active power after using the 223.9 Watt inverator circuit, and also produces an efficiency value. the apparent power is 83% before using the inverator circuit 275.18 VA and the apparent power after using the inverator circuit is 227.94 VA.

Acknowledgements

This work was supported by Universitas Muhammadiyah Sumatera Utara.

References

[1] M. Putri and F. I. Pasaribu, "Analisis Kualitas Daya Akibat Beban Reaktansi Induktif (XL) di Industri," *JET (Journal Electr. Technol.*, vol. 3, no. 2, pp. 81–85, 2018.

[2] F. I. Pasaribu, "Implementasi Filter Rc Pada Reduksi Harmonisa Dalam Pengobatan Ceragem," *J. Elektro Dan Telkomunikasi*, vol. 4, no. 2, pp. 62–, 2018.

[3] M. F. Hakim, "Analisis kebutuhan capacitor bank beserta implementasinya untuk memperbaiki faktor daya listrik di politeknik kota malang," *J. Eltek*, vol. , no. 1, pp. 105–118, 2017.

[4] A. Wahid, "Analisis kapasitas dan kebutuhan daya listrik untuk menghemat penggunaan energi listrik di fakultas teknik universitas tanjungpura," *J. Tek. Elektro Univ. Tanjungpura*, vol. 2, no. 1, 2014.

[5] A. Fauzi and R. Aisuwarya, "Sistem Kendali Jarak Jauh dan Monitoring Penggunaan Listrik pada Pompa Air Melalui Smartphone," *JITCE (Journal Inf. Technol. Comput. Eng.*, vol. 4, no. 01, pp. 32–39, 2020.

[6] A. Suryanto, "Implementasi Model Analisis Perbaikan Faktor Daya Listrik Rumah Tangga dengan Simulasi Perangkat Lunak," *J. Kompetensi Tek.*, ol. 3, no. 1, 2011.

[7] F. I. Pasaribu, P. Harahap, and M. Adam, "Design of Energy Storage Circuits for Efficiency of Electric Power Usage in Computer Devices," *Budapest Int. Res. Exact Sci. J.*, vol. 2, no. 3, pp. 368–375, 2020.

[8] A. D. N Evalina, A Wicaksana, "Perbaikan Faktor Daya Transformator Berbeban Pada Beban dan Saluran dengan Menggunakan Kapasitor," *Semin. Nas. 1 UISU*, vol. 1, pp. 26–33, 2017, [Online]. ailable: https://scholar.google.com/citations?view_op=view_citation&hl=id&user=7L-3dBoAAAAJ&pagesize=80&citation_for_view=7L-3dBoAAAAJ:qjMakFHDy7sC.

[9] N. Asri, "Pemodelan Dan Analisa Lonjakan Arus Saat Starting Motor Induksi Tiga Fasa Menggunakan Solid-State Soft Start Switching." niversity of Muhammadiyah Malang, 2019.

[10] K. L. Yana, K. R. Dantes, and N. A. Wigraha, "Rancang Bangun Mesin Pompa Air Dengan Sistem Recharging," *J. Pendidik. Tek. Mesin Undiksha*, vol. 5, no. 2, 2017.

[11] G. Santoso, W. Handajadi, S. Hani, and G. H. Baskara, "Rancang Bangun Alat Ukur dan Pengendali Pemakaian Daya Listrik berbasis SMS Ga way," 2019.

[12] S. C. Pillai, J. M. Kelly, R. Ramesh, and D. E. McCormack, "Advances in the synthesis of ZnO nanomaterials for varistor devices," *J. Mater. Chem. C*, vol. 1, no. 20, pp. 3268–3281, 2013.

[13] F. I. A. Z. Mumtaza And Z. A. I. Supardi, "Analisis Penggunaan Soft Start Untuk Mengurangi Lonjakan Arus Awal Pemakaian Listrik," *Inov. Fis. Indones.*, vol. 8, no. 3, 2019.

[14] F. A. Prasetyo, "Rancang Bangun Soft Starting Pada Motor Induksi Satu Fasa Berbasis Sensor Arus Menggunakan Mikrokontroler ARDUINO MEGA 60." undip vokasi, 2019.

[15] R. J. Sitorus and E. Warman, "Studi Kualitas Listrik Dan Perbaikan Faktor Daya Pada Beban Listrik Rumah Tangga Menggunakan Kapasitor," *Singuda Ensikom*, vol. 3, no. 2, pp. 64–69, 2013.

[16] P. Harahap, I. Nofri, F. Arifin, and M. Z. Nasution, "Sosialisasi Penghematan dan Penggunaan Energi Listrik Pada Desa Kelambir Pantai Labu," in *Prosiding Seminar Nasional Kewirausahaan*, 2019, . 1, no. 1, pp. 235–242.

[17] B. G. Melipurbowo, "Pengukuran Daya Listrik Real Time Dengan Menggunakan Sensor Arus ACS. 712," *Orbith Maj. Ilm. Pengemb. Rekayasa dan Sos.*, vol. 12, no. 1, 2016.

[18] W. Handajadi, "Peningkatan Kualitas Daya Listrik Dalam Pemakaian Luminer Menggunakan Lampu Hemat Energi (LHE)," *J. Teknol.*, vol. 7, no. 2, pp. 134–140, 2014.

[19] B. S. Hartono, S. Prayogo, and B. M. Wahyu, "Pengembangan Kontrol Peningkatan Daya Listrik Rumah Tangga Menggunakan On/off Grid Tie Inverter," *J. Teknol. Elektro*, vol. 8, no. 3, p. 240496, 2017.

Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved

Authors' information



Faisal Irsan Pasaribu obtained an ST degree in Electrical Engineering from the Muhammadiyah University of North Sumatra, Indonesia in 2003. His Masters in Electrical Engineering was completed in 2014 at the Department of Electrical Engineering, University of North Sumatra,Indonesia. Currently he is the head of the Electrical Engineering Study Program and a lecturer in The Electrical Engineering Department, Universitas Muhammadiyah Sumatera Utara, Indonesia.



Noorly Evalina obtained her ST degree in Electrical Engineering from Al Azhar University, North Sumatra, Indonesia in 1993. Her Master's Degree in Electrical Engineering was completed in 2012 at the Department of Electrical Engineering, National Institute of Science and Technology, Indonesia. Currently he is a lecturer in The Electrical Engineering Department, Universitas Muhammadiyah Sumatera Utara, Indonesia.



Partaonan Harahap obtained his ST degree in Electrical Engineering from the Muhammadiyah University of North Sumatra, Indonesia in 2005. His Master's Degree in Electrical Engineering was completed in 2015 at the Department of Electrical Engineering, University of North Sumatra, Indonesia. Currently he is a lecturer The Electrical Engineering Department, Universitas Muhammadiyah Sumatera Utara, Indonesia.

Copyright © 2021 Universitas Muhammadiyah Yogyakarta - All rights reserved

Inverator Starting Energy Saver Design For Electric Power Efficiency In Water Pumps

ORIGINALITY REPORT

15%	%	15%	%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	Putri Dwi Lestari, Gunawan Gunawan, Ida Widihastuti. "Analisa Perhitungan Nilai Kapsitor Bank untuk Perbaikan Faktor Daya pada PT. Karya Toha Putra", Elektrika, 2020 Publication	3%
2	Faisal Irsan Pasaribu, Ira Devi Sara, Tarmizi Tarmizi, Nasaruddin Nasaruddin. "Harmonics Step Filter Control Model In Household Electricity", 2023 2nd International Conference on Computer System, Information Technology, and Electrical Engineering (COSITE), 2023 Publication	2%
3	Mohamed Samy, A. M. Bassiuny, A. S. Tolba. "FPGA based Motor Current Signature Analysis for Stator Faults Detection in Three Phase Induction Motor", 2023 3rd International Conference on Electrical, Computer, Communications and Mechatronics Engineering (ICECCME), 2023 Publication	1%

4	Chico Hermanu Brillianto Apribowo, Luthfy Mahkmudy, Oktavian Listiyanto. "Design variables reactive power compensator using magnetic energy recovery switch (MERS) for induction motor", AIP Publishing, 2020 Publication	1 %
5	Jaka Persada Sembiring, Elka Pranita, Novia Utami Putri, Akhmad Jayadi, Rian Fadli. "Water Quality Control and Monitoring Systems in VANAME Shrimp Ponds Using the Fuzzy Method", 2023 International Conference on Networking, Electrical Engineering, Computer Science, and Technology (IConNECT), 2023 Publication	1 %
6	Madhumita Sinha, Rajat Mahapatra, Biswanath Mondal, Ranajit Ghosh. "High sensitivity of gas sensing properties of ZnO microrods on FTO substrate", 2016 International Conference on Microelectronics, Computing and Communications (MicroCom), 2016 Publication	1 %
7	Bayu Febri Alfianto, Itmi Hidayat Kurniawan. "Rancang Bangun Pengendali Kapasitor Bank Untuk Koreksi Faktor Daya Listrik Berbasis Internet of Things", Jurnal Riset Rekayasa Elektro, 2023 Publication	1 %

8	Siti Sendari, Muladi Muladi, Hakkun Elmunsyah, Sigit Prasetyo Haq. "Integrating Scheduling System for Managing A Huge Number of Electrical Devices", 2018 2nd Borneo International Conference on Applied Mathematics and Engineering (BICAME), 2018 Publication	1 %
9	F I Pasaribu, A G Lubis, M Safril, B S Kusuma, M Fadlan. "Disain Smart Electricity Penghematan pada Peralatan Listrik Menggunakan Sensor Ultrasonic", Jurnal MESIL (Mesin Elektro Sipil), 2021 Publication	1 %
10	Falia Innocentia Ananda Sunarko, Epyk Sunarno, Diah Septi Yanarati, Eny Kusumawati. "Smart DC Home for Energy Saving with Android-Based Real-Time Energy Monitoring", 2022 International Electronics Symposium (IES), 2022 Publication	1 %
11	Partaonan Harahap, Faisal Irsan Pasaribu, Chandra A Siregar. "Network Quality Comparison 4g LTE X And Y in Campus UMSU", Journal of Physics: Conference Series, 2021 Publication	1 %
12	Salamun Salamun, Firman Wazir. "RANCANG BANGUN SISTEM PENGENALAN WAJAH	1 %

DENGAN METODE PRINCIPAL COMPONENT ANALYSIS", Rabit : Jurnal Teknologi dan Sistem Informasi Univrab, 2016
Publication

---

13 Anta Wijaya, Yuliarman Saragih, Ibrahim Lammada, Rahmat Hidayat, Agatha Elisabet S, Nguyen Thi Nhu Van. "Yaiao Application Collecting Log File RF 4G Android-Based Replacing Data Cables to Laptop on Traditional RF Drive Test Models", 2020 3rd International Conference on Mechanical, Electronics, Computer, and Industrial Technology (MECnIT), 2020 — 1%
Publication

---

14 Alfonsius Yohandrik Bi Dawe. "Electricity Monitoring System based on Fuzzy Logic and Internet of things", Internet of Things and Artificial Intelligence Journal, 2021 — <1%
Publication

---

15 Arif Dwi Laksito, Ainul Yaqin, Sumarni Adi, Mardhiya Hayaty. "Neural Network Optimization for Prediction of Student Study Period", 2021 Sixth International Conference on Informatics and Computing (ICIC), 2021 — <1%
Publication

---

16 Ton Duc Thang University — <1%
Publication

---

17 "Proceedings of the International e-Conference on Intelligent Systems and Signal Processing", Springer Science and Business Media LLC, 2022 <1%
Publication

Exclude quotes	Off	Exclude matches	Off
Exclude bibliography	Off		