

GRACEFUL LABELING AND ρ^{\wedge} LABELING ON THE 8-BINTANG GRAPH

by Tua Halomoan

Submission date: 02-Dec-2023 08:06AM (UTC+0700)

Submission ID: 2244814922

File name: urnal_Graceful_Labeling_And_Labeling_on_The_8-Bintang_Grahp.pdf (233.8K)

Word count: 2460

Character count: 10377

GRACEFUL LABELING AND $\hat{\rho}$ LABELING ON THE 8-BINTANG GRAPH

Z AMRI, T H HARAHAP, IRVAN

Abstract. A graph $G = (V, E)$ is ordered set V and E , where V is finite, non-empty set objects called vertices or nodes, and E is the set of arcs. Graceful labeling is an injective function f of the set of vertices V to the set of numbers $\{0, 1, 2, \dots, |E|\}$ which induces the bijective function f' from the set of arc E to the set of number $\{1, 2, \dots, |E|\}$, where each arc $uv \in E$ node $u, v \in V$ apply $f'(uv) = |f(u) - f(v)|$, is aligned with the variations and modifications of graceful labeling. The basic idea of constructing graceful labeling and $\hat{\rho}$ labeling on an 8-Bintang graph begins with A-Bintang and H-Bintang, which is then referred to as a star alphabet graph with the question how if the number is given a star graph S_n then a graph constructed from 2 circle graph where one vertex of the circle graph becomes the center of the graph while the other node is given graph Star S_n . In this paper is given for 8-Bintang graph with C_4 and C_3 for n even.

1. INTRODUCTION

A graph G is an ordered pair (V, E) with V being the set of nodes or vertices and E is a set of multisets consisting of two elements namely element V and element E each called nodes and arcs. Labeling on a graph is essentially giving a certain value to a node and or an arc that satisfies certain rules as well. in [4] noted for the last 50 years until data dated November 13, 2010 there are 1198 articles that discuss about the various kinds of labeling[3]. In general, Graceful labeling on graph $G (V,E)$ is an injective

Received 19-07-2018, Accepted 27-09-2018.

2010 Mathematics Subject Classification: 05C78

Keywords and Phrases: Graceful labeling, $\hat{\rho}$ labeling, 8-Bintang graph

function f of the set of vertices V to the set of numbers $\{0, 1, 2, \dots, |E|\}$, which induces the bijective function f from the set of arc E to set of numbers $\{1, 2, \dots, |E|\}$ Where each arc $uv \in E$ with the vertex $uv \in E$ apply $f'(uv) = |f(u) - f(v)| [1, 2, 5, 7]$.

Labeling $\hat{\rho}$ is a modification of the graceful labeling of the injective function g of the set of vertices V to the set of numbers $\{0, 1, 2, \dots, |E| + 1\}$ that induce the bijective function g from the set of arc E to set of numbers $\{1, 2, \dots, |E|\}$, where each arc $uv \in E$ with node $u, v \in V$ apply $g(uv) = |g(u) - g(v)| [1, 2, 3, 5, 7]$.

The cycle graph of length n is a graph with n vertices $\{v_1, v_2, \dots, v_n\}$ and $\{v_1v_2, v_2v_3, \dots, v_{(n-1)}v_n, v_nv_{(n+1)}\} [6]$. In Figure 1.1 we have examples of circular graphs C_3, C_4, C_5 .




Figure 1: Circular Graph (Cycle)

The S_n star graph is a graph constructed from a central node and then adds a number of leaf nodes to the central node. The star graph has $(n+1)$ node and arc n .




Figure 2: Star Graph

The star graph is a subclass of a tree graph, since the star graph has no circular subgraph.

The 8 -Bintang graph with the builder C_3 (Fig. 3) is a graph constructed from two circular graphs C_3 where one of the vertices of the circle graph C_3 becomes the center of the graph while the other node is given the star S_n .




Figure 3: 8 – Bintang with C_3

The 8-Bintang graph with the builder C_4 (Fig. 4) is a graph constructed from two circular graphs where one of the vertices of the circle graph becomes the center of the graph while the other node is given the star S_n .




Figure 4: 8 – Bintang with C_4

So that can be given the definition of 8-Bintang graph is a graph built from 2 pieces of circle graph where one of the vertices of the circle graph becomes the center of the graph while the other node is given the star graph S_n .

2. GRACEFUL LABELING ONn 8-BINTANG GRAPH

In this section will be given graceful labeling construction on 8-Star graph.

Theorem 2.1 *The 8-Bintang Graph with C_3 has a graceful labeling for n even*

Proof 2.1 *Suppose the notation of the 8-Bintanggraph node with C_3 is given in Figure 5*

In Figure.5 above shows that the set of 8-Bintang graph nodes is $\{c_0, c_1, \dots, c_4, v_1^1, \dots, v_n^1, v_1^2, \dots, v_n^2, v_1^3, \dots, v_n^3, v_1^4, \dots, v_n^4\}$ and the arc set of 8-Bintang graph




Figure 5: Notasi 8 – Bintang Graph with C_3

is $\{c_0c_1, c_1c_2, c_2c_0, c_0c_3, c_3c_4, c_4c_0, c_1v_1^1, c_1v_2^1, \dots, c_1v_n^1, c_2v_1^2, \dots, c_2v_n^2, c_3v_1^3, \dots, c_3v_n^3, c_4v_1^4, \dots, c_4v_n^4\}$ so that the number of elements V and E are $|V| = 4n + 5$ and $|E| = 4n + 6$ respectively

Defined labeling by using the f notation for the node as follows:

$$f(c_0) = n + 1 \tag{1}$$

$$f(c_1) = 0 \tag{2}$$

$$f(c_2) = 3n + 6 \tag{3}$$

$$f(c_3) = n + 2 \tag{4}$$

$$f(c_4) = 3n + 5 \tag{5}$$

$$f(v_i^1) = 4n + 6 - i; \quad i = 1, 2, \dots, n \tag{6}$$

$$f(v_i^2) = i; \quad i = 1, 2, \dots, n \tag{7}$$

$$f(v_i^3) = \begin{cases} n + 2 + 2i; & i = 1, 2, \dots, \frac{1}{2}n \\ n + 3 + 2i; & i = \frac{1}{2}n + 1, \frac{1}{2}n + 2, \dots, n \end{cases} \tag{8}$$

$$f(v_i^4) = \begin{cases} n + 1 + 2i; & i = 1, 2, \dots, \frac{1}{2}n + 1 \\ n + 2 + 2i; & i = \frac{1}{2}n + 2, \frac{1}{2}n + 3, \dots, n \end{cases} \tag{9}$$

The labeling f defined in equation (1) - (9), labeling each node member of an 8-Bintang graph is an injective mapping from V to set $\{0, 1, \dots, |E|\}$. Each $uv \in E$ arc is labeled by the labeling of f' , induced by the labeling of vertices through the equation $f'(uv) = |f(u) - f(v)|$ On an 8-Bintang graph expressed as follows:

$$f'(c_0c_1) = |f(c_0) - f(c_1)| = |(n + 1) - (0)| = 4 + 1 \quad (10)$$

$$f'(c_1c_2) = |f(c_1) - f(c_2)| = |(0) - (3n + 6)| = 3n + 6 \quad (11)$$

$$f'(c_2c_0) = |f(c_2) - f(c_0)| = |(3n + 6) - (n + 1)| = 2n + 5 \quad (12)$$

$$f'(c_0c_3) = |f(c_0) - f(c_3)| = |(n + 1) - (n + 2)| = 1 \quad (13)$$

$$f'(c_3c_4) = |f(c_3) - f(c_4)| = |(n + 2) - (3n + 5)| = 2n + 3 \quad (14)$$

$$f'(c_4c_0) = |f(c_4) - f(c_0)| = |(3n + 5) - (n + 1)| = 2n + 4 \quad (15)$$

$$f'(c_1v_i^1) = |f(c_1) - f(v_i^1)| = |(0) - (4n + 6 - i)| = 4n + 6 - i; \quad i = 1, 2, \dots, n \quad (16)$$

$$f'(c_2v_i^2) = |f(c_2) - f(v_i^2)| = |(3n + 6) - (i)| = 3n + 6 - i; \quad i = 1, 2, \dots, n \quad (17)$$

Since $f(v_i^3)$ has two conditions such as equation (8), the arc value adjacent to the node $f(v_i^3)$ can be expressed according to the conditions specified in (8) for $i = 1, 2, \dots, 1/2n$ is obtained by the equation (18) and for the condition kondisi $i = 1/2n + 1, 1/2n + 2, \dots, n$ we obtain the equation (19) below

$$f'(c_3v_i^3) = |f(c_3) - f(v_i^3)| = |(n + 2) - (n + 2 + 2i)| = 2i; \quad i = 1, 2, \dots, \frac{1}{2}n \quad (18)$$

$$f'(c_3v_i^3) = |f(c_3) - f(v_i^3)| = |(n + 2) - (n + 3 + 2i)| = 2i + 1; \quad i = \frac{1}{2}n + 1, \frac{1}{2}n + 2, \dots, n \quad (19)$$

Similarly to obtain $f'(c_4v_i^4)$ with the conditions expressed in equation (9). The arc $f'(c_4v_i^4)$ as in the following (20 - 21) equations

$$f'(c_4v_i^4) = |f(c_4) - f(v_i^4)| = |(3n + 5) - (n + 1 + 2i)| = 2i; \quad i = 1, 2, \dots, \frac{1}{2}n + 1 \quad (20)$$

$$f'(c_4v_i^4) = |f(c_4) - f(v_i^4)| = |(3n + 5) - (n + 2 + 2i)| = 2i + 1; \quad i = \frac{1}{2}n + 2, \frac{1}{2}n + 3, \dots, n \quad (21)$$

Based on f labeling defined in equation (1) - (9) each vertex has a different label and is a subset of numbers $\{0, 1, 2, \dots, |E|\}$ and always does not contain the node labeling $2n + 4$ and $3n + 4$. Then the labeling of f' induced by the vertex labeling f , gives different values to each arc as in (10) - (21) which is the set of numbers $\{1, 2, \dots, |E|\}$. Based on the above result, then f is the graceful labeling on 8-Bintang graph with n even.

Theorem 2.2 *The 8-Bintang Graph with C_4 has a graceful labeling*

Proof 2.2 *Suppose the notation of the 8-Bintanggraph node with C_3 is given in Figure.6*

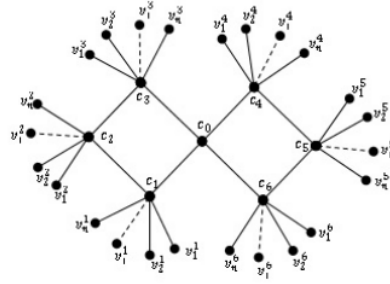


Figure 6: Notasi 8 – Bintang Graph with C_4

In Figure.6 above shows that the set of 8-Bintang graph nodes is $\{c_0, c_1, \dots, c_6, v_1^1, \dots, v_n^1, v_1^2, \dots, v_n^2, v_1^3, \dots, v_n^3, v_1^4, \dots, v_n^4, v_1^5, v_1^5, \dots, v_n^5, v_1^5, \dots, v_n^6\}$ and the arc set of 8-Bintang graph is $\{c_0c_1, c_1c_2, c_2c_3, c_3c_0, c_0c_4, c_4c_5, c_5c_6, c_6c_0, c_1v_1^1, c_1v_2^1, \dots, c_1v_n^1, c_2v_1^2, \dots, c_2v_n^2, c_3v_1^3, \dots, c_3v_n^3, c_4v_1^4, \dots, c_4v_n^4, c_5v_1^5, \dots, c_5v_n^5, c_6v_1^6, \dots, c_6v_n^6\}$ so that the number of elements V and E are $|V| = 4n + 5$ and $|E| = 4n + 6$ respectively

Defined labeling by using the f notation for the node as follows:

$$f(c_0) = n + 1 \tag{22}$$

$$f(c_1) = 5n + 8 \tag{23}$$

$$f(c_2) = 0 \tag{24}$$

$$f(c_3) = 2n + 4 \tag{25}$$

$$f(c_4) = 2n + 3 \tag{26}$$

$$f(c_5) = 2n + 2 \tag{27}$$

$$f(c_6) = 5n + 7 \tag{28}$$

$$f(v_i^1) = i; \quad i = 1, 2, \dots, n \tag{29}$$

$$f(v_i^2) = 5n + 8 + i; \quad i = 1, 2, \dots, n \tag{30}$$

$$f(v_i^3) = 2n + 5 + i; \quad i = 1, 2, \dots, n \quad (31)$$

$$f(v_i^4) = 3n + 6 + i; \quad i = 1, 2, \dots, n \quad (32)$$

$$f(v_i^5) = 4n + 6 + i; \quad i = 1, 2, \dots, n \quad (33)$$

$$f(v_i^6) = n + 1 + i; \quad i = 1, 2, \dots, n \quad (34)$$

The labeling f defined in equation (22) - (34), will label each member node of an 8-Bintang graph with a builder element c_4 is an injective mapping from V to set $\{0, 1, \dots, |E|\}$. Each $uv \in E$ arc is labeled by the labeling of f' , induced by the labeling of vertices through the equation $f'(uv) = |f(u) - f(v)|$ On the 8-Bintang graph expressed as follows:

$$f'(c_0c_1) = |f(c_0) - f(c_1)| = |(n + 1) - (5n + 8)| = 4n + 7 \quad (35)$$

$$f'(c_1c_2) = |f(c_1) - f(c_2)| = |(5n + 8) - (0)| = 5n + 8 \quad (36)$$

$$f'(c_2c_3) = |f(c_2) - f(c_3)| = |(0) - (2n + 4)| = 2n + 4 \quad (37)$$

$$f'(c_3c_0) = |f(c_3) - f(c_0)| = |(2n + 4) - (n + 1)| = n + 3 \quad (38)$$

$$f'(c_0c_4) = |f(c_0) - f(c_4)| = |(n + 1) - (2n + 3)| = n + 2 \quad (39)$$

$$f'(c_4c_5) = |f(c_4) - f(c_5)| = |(2n + 3) - (2n + 2)| = 1 \quad (40)$$

$$f'(c_5c_6) = |f(c_5) - f(c_6)| = |(2n + 2) - (5n + 7)| = 3n + 5 \quad (41)$$

$$f'(c_6c_0) = |f(c_6) - f(c_0)| = |(5n + 7) - (n + 1)| = 4n + 6 \quad (42)$$

$$f'(c_1v_i^1) = |f(c_1) - f(v_i^1)| = |(5n + 8) - (i)| = 5n + 8 - i; \quad i = 1, 2, \dots, n \quad (43)$$

$$f'(c_2v_i^2) = |f(c_2) - f(v_i^2)| = |(0) - (5n + 8 + i)| = 5n + 8 + i; \quad i = 1, 2, \dots, n \quad (44)$$

$$f'(c_3v_i^3) = |f(c_3) - f(v_i^3)| = |(2n + 4) - (2n + 5 + i)| = 1 + i \quad i = 1, 2, \dots, n \quad (45)$$

$$f'(c_4v_i^4) = |f(c_4) - f(v_i^4)| = |(2n + 3) - (3n + 6 + i)| = n + 3 + i \quad i = 1, 2, \dots, n \quad (46)$$

$$f'(c_5v_i^5) = |f(c_5) - f(v_i^5)| = |(2n + 2) - (4n + 6 + i)| = 2n + 4 + i; \quad i = 1, 2, \dots, n \quad (47)$$

$$f'(c_6v_i^6) = |f(c_6) - f(v_i^6)| = |(5n + 7) - (n + 1 + i)| = 4n + 6 - i; \quad i = 1, 2, \dots, n \quad (48)$$

Based on labeling f defined in equation (22) - (34) each vertex has a different label and is a subset of numbers $\{0, 1, 2, \dots, |E|\}$ and always does not contain the node $2n + 5$ and $3n + 6$. Then labeling f' induced by the

labeling of node f gives different values to each arc as in (35) - (48) which is the set of numbers $\{1, 2, \dots, |E|\}$. Based on the above results, then f is a graceful labeling for 8-Bintang graph.

3. $\hat{\rho}$ LABELING 8-BINTANG GRAPH WITH c_3 FOR n EVEN

Corollary 3.1 The 8-Bintang graph with c_3 consists labeling $\hat{\rho}$ for n even

Proof 3.3 Suppose the 8-Bintang graph notation with C_3 is shown in Figure. 5. Using the same way of graceful proofing of Theorem 2.1 defining the node $g = f$ labeling as equation (1)–(9) and arc labeling $g(uv) = |g(u) - g(v)|$, where $uv \in E$ with $u, v \in V$ we obtain the node labeling from the 8-Bintang graph to the subset numbers $\{0, 1, 2, \dots, |E| + 1\}$, and arc labeling from the 8-Bintang graph to the set of numbers $\{1, 2, \dots, |E|\}$. So the 8-Bintang graph with C_3 has labeling

Corollary 3.2 the 8-Bintang graph with c_4 is $\hat{\rho}$ labeling

Proof 3.4 Suppose the 8-Bintang graph notation with C_4 is shown in Figure. 6. Using the same method of proof on Corollary 3.1 that will form $\hat{\rho}$ labeling, which is constructed as equation (22)–(48).

4. CONCLUSION

In this paper we have given Graceful labeling and $\hat{\rho}$ labeling on 8-Bintang graph constructed from 2 circular graph where one of the vertices of the circle graph becomes the center of the graph while the other vertices is given S_n star graph. More generally it can be proved that 8-Bintang graphs have graceful labeling and $\hat{\rho}$ labeling.

REFERENCES

- Amri Z, Ahmad M, Huda N, Supriadi, Sugeng K.A. (2011). Pelabelan Graceful, Skolem Graceful dan Pelabelan Pada Graf S_3 . *Prosiding Seminar Nasional UNY. Yogyakarta*, M131–M136.
- Amri Z dan Sugeng K.A. (2011). Pelabelan Graceful, Skolem Graceful dan Pelabelan Pada Graf Kelabang. *Jurnal EUREKA Pendidikan Matematika FKIP UMSU . Medan*, Vol 4 No. 2 109–115.
- Baca and Miller. (2008). Super Edge-Antimagic Graphs: A Wealth of Problems and Some Solution. *Brown Walker Press. USA*

4. Galian J.A, (2010). Dynamic survey of graph Lebeling. *Electronic Journal of kombinatorics*,17#ds6
5. Huda N and Amri Z. (2012). Pelabelan Graceful, Skolem Graceful dan Pelabelan $\hat{\rho}$ Pada Graf H-Bintang dan A-Bintang. *Jurnal Matematika Murni dan Terapan EFSILON. Banjarbaru*, Vol 6 NO. (1), Hal 30–37.
6. Rosen, K. H. (2007). *Discrete Mathematics and Its Applications* (6th ed.). Toronto: McGraw-Hill.
7. Sevenhot, Sugeng K.A, Denny R.S, (2010). Pelabelan Graceful, Skolem Graceful dan Pelabelan $\hat{\rho}$ Pada Dua Graf. *Prosiding Seminar Nasional UNPAR. Bandung*, MS183–MS191.

ZULFI AMRI: Universitas Muhammadiyah Sumatera Utara, Medan, Indonesia.
E-mail: zulfiamri@umsu.ac.id

TUA HALOMOAN HARAHAP: Universitas Muhammadiyah Sumatera Utara, Medan, Indonesia.
E-mail: tuahalomoan@umsu.ac.id

IRVAN: Universitas Muhammadiyah Sumatera Utara, Medan, Indonesia.
E-mail: irvan@umsu.ac.id

GRACEFUL LABELING AND ρ^{\wedge} LABELING ON THE 8-BINTANG GRAPH

ORIGINALITY REPORT

19%

SIMILARITY INDEX

%

INTERNET SOURCES

19%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Meliana Pasaribu, Yundari Yundari, Muhammad Ilyas. "Graceful Labeling and Skolem Graceful Labeling on the U-star Graph and It's Application in Cryptography", Jambura Journal of Mathematics, 2021
Publication 7%
- 2 Z Amri, I Irvan, I Maryanti, H Sumardi. " Odd graceful labeling on the (, 3) it's variation ", Journal of Physics: Conference Series, 2021
Publication 4%
- 3 Zhihe Liang. "Decomposition of complete multigraphs into crown graphs", Journal of Applied Mathematics and Computing, 03/26/2009
Publication 2%
- 4 Miftahul Rizka Nasution, Zainal Azis, Irvan Irvan. "Development of a virtual learning environment based on mathematical discourse to support critical thinking skills for

junior high school students", Walter de Gruyter GmbH, 2023

Publication

5

Kiki A. Sugeng, Surip, Rismayati. "On odd harmonious labeling of m-shadow of cycle, gear with pendant and Shuriken graphs", AIP Publishing, 2019

Publication

1 %

6

Leni Prastiwi, Risang Narendra, Rachmadania Akbarita, M. Nur Haqqul Qomarudin. "Hamiltonian in 5-Connected Graph", Proceedings of the International Seminar on Business, Education and Science, 2022

Publication

1 %

7

Ziang Zhang. "The leader election criterion for decentralized economic dispatch using incremental cost consensus algorithm", IECON 2011 - 37th Annual Conference of the IEEE Industrial Electronics Society, 11/2011

Publication

1 %

8

Martín A. Pucheta, Agostino Butti, Valerio Tamellini, Alberto Cardona, Luca Ghezzi. "Topological Synthesis of Planar Metamorphic Mechanisms for Low-Voltage Circuit Breakers", Mechanics Based Design of Structures and Machines, 2012

Publication

1 %

9

Leonid A. Shundrin. "

(Fluoroorgano)fluoroboranes and -borates. 11

[1] The Electrochemical Oxidation of

Polyfluorophenyltrifluoroborate Anions in

Acetonitrile", Zeitschrift für anorganische und
allgemeine Chemie, 08/2004

Publication

<1 %

10

J. Melenchon, F. de la Torre, I. Iriondo, F. Alias,

E. Martinez, L. Vicent. "Text to visual synthesis

with appearance models", Proceedings 2003

International Conference on Image

Processing (Cat. No.03CH37429), 2003

Publication

<1 %

11

Jeon, S.e.. "Topology aggregation: Merged-

star method for multiple non-isomorphic

topology subgraphs", Computer

Communications, 20060726

Publication

<1 %

12

Yong Chen, Yong Zhong. "Automatic Path-

Oriented Test Data Generation Using a Multi-

population Genetic Algorithm", 2008 Fourth

International Conference on Natural

Computation, 2008

Publication

<1 %

13

MADHUMANGAL PAL, G. P. BHATTACHARJEE.

"THE PARALLEL ALGORITHMS FOR

DETERMINING EDGE-PACKING AND

EFFICIENT EDGE DOMINATING SETS IN

<1 %

INTERVAL GRAPHS", Parallel Algorithms and Applications, 1995

Publication

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off